



IMPORTANT!!

In order to have full use of your light, **YOU MUST** take the Freedom out of Demonstration mode!

To Remove From Demonstration Mode: **Press and hold** button until light turns off. (about 20 seconds)

We Take Quality Seriously

If your Freedom Micro fails for any reason other than abuse or battery expiration, return it for free repair or replacement to:

LRI • PO Box 58 • Blachly, OR 97412

Technical Specifications

Case: Glass filled Polyurethane with superior resistance.

LED: Ultra-Bright Light Emitting Diode. Will never burn out.

Power Supply: One CR-2032 3V lithium coin cells for Red, Yellow, Orange and Infrared LED Beams.


Two CR-2016 3V lithium coin cells for White, Blue, Green, Night Vision Green, Purple and Ultraviolet LED Beams.

We recommend Energizer® batteries.

Micro Processor: State-of-the-art "smart circuit" with multiple mode selection activated by a single touch of a button.

Beam Colors: Available in Red, White, Blue, Green, Night Vision Green, Yellow and Orange.

Infrared and Ultraviolet available by special order.

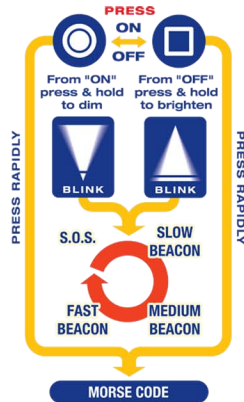


Single Button Operation

1. Press Button for On and Off
2. To Control Brightness
 - From Off** - Press and hold, release at desired brightness. Light will "blink" at full brightness.
 - From On** - Press and hold, release at desired dimness. Light will "blink" at lowest light level.
3. For Safety Beacons - Press and hold past "blink" You can choose Slow Beacon, Medium Beacon, Fast Flash, or S.O.S.
4. Signal/Morse Code (Squeeze only light) Press rapidly until light will not stay on. To exit Signal/Morse Code, press until light turns off.

Hands Free Clip

(If receiving your light in a presentation box, the clip is located under a gray felt molding.)

Simply snap the light into place as shown in the photo below and position light where needed. Works with or without quick release ring.

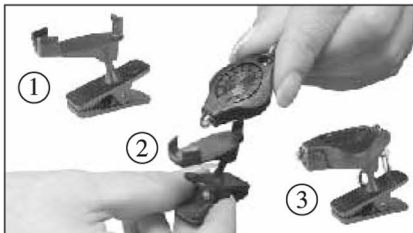

To Replace Single Battery


1. Carefully remove the cap on the logo side of the Freedom Micro-Light using a pointed tool such as a ball point pen or the tip of a nail file.

2. Replace with **ONE** CR-2032 lithium battery for **Red, Yellow, Orange and Infrared** beams.

Install + side toward the cap. Be sure top of battery is under metal strap.

3. Replace the cap by aligning tab and snap shut.

In the event of water penetrating the case, simply open the case and allow to dry.



To Replace Dual Batteries


1. Carefully remove the cap on the logo side of the Freedom Micro-Light using a pointed tool such as a ball point pen or the tip of a nail file.

2. Replace with **TWO** CR-2016 lithium batteries for **White, Blue, Green, Night Vision Green, Purple and Ultraviolet** beams.

Install both + sides toward the cap. Be sure top of battery is under metal strap.

3. Replace the cap by aligning tab and snap shut.

In the event of water penetrating the case, simply open the case and allow to dry.



PHOTON Light.com

200 W 38th Avenue • Eugene, Oregon 97405
 P. 1.877.584.6898, 541.925.3149 F. 541.484.6898
 www.photonlight.com